

Pendant/SurfaceMount - Assembled Fixture


LED LINEAR™



In addition to offering even lighting, this fixture allows beam adjustment and large choice of installation options.

Features

- Aluminum heatsink insert at 2 different heights offers a choice between 3 different beam angles.
- Designed to give a uniform light without hot spots.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Compatible with multiple installation accessories.
- Only available in North America.



Project name _____

Fixture type _____ Phase _____

Specifier _____ Date _____



Linear weight:
0.16 lbs/ft (without optic)

Cable Feed: End (E), Behind (B)
Max 6.3 W/ft (with heatsink insert)


Order Code

Family	LED Tape ¹	CRI	CCT	Finish	Optic	Cable / Connector ⁵	Cable Position	Mounting ³	Optional Accessories	Fixture length (mm)	Ingress
VarioLED 1400	-----	W_	---	---	---	---	---	---	---	-----	IP20
Pendant/Surface	Nexus HD6-1.8 w/ft, 155 lm/ft	W8 85CRI	22 2200K ²	S Silver	CL Clear	FM Female & Male (4")	E End	FMC Flat Mounting Clip	XX None	Refer to length chart on page 4	IP20
	Nexus HD10-2.9 w/ft, 250 lm/ft	W9 95CRI	27 2700K	B Black	SP Spread	MS Male one side only (4")	B Behind	45C 45° Mounting Clip	CK Canopy Kit ⁶		
	Nexus HD15-4.7 w/ft, 400 lm/ft		30 3000K	W White	SO Semi-Opal		SC Swivel Clip	HI Heatsink ⁷ Insert			
			35 3500K	C Custom ⁴	OP Opal	PC Phantom Clip					
			40 4000K		HO High Opal	MK Magnet Kit					
		50 5000K ²		FC Focus 15°	OB Open Cable both sides [6]	S9 Wall Mounting Clip					
				PR Prime	OS Open Cable one side only [6]	SK Suspension Kit					

¹ Delivered Lumens @3000K with Clear Optic. ² Available only in 85CRI. ³ See Components spec sheet for additional mounting options and accessories. ⁴ Provide RAL code for custom finish. ⁵ 2 x 22 AWG wires are supplied. See page 4 for more connectors. ⁶ Order with Suspension Kit for live electrical feeds. ⁷ Visible dotting may occur with this accessory.

LED Tape Specifications

Color vector graphic



Color distortion graphic



- R_r 92
- R_g 101
- CRI 95
- R9 85

- 2200
- 2700
- 3000
- 3500
- 4000
- 5000 Kelvin

HD - High density / 8.93 mm LED pitch



L90/B10
> 60,000 h







W_{xxx}/
339

		HD6		HD10		HD15		Power (W/ft) ⁸	HD6	HD10	HD15
		CCT	Lumen/ft ⁴	W/ft ⁸	Lumen/ft ⁴	W/ft ⁸	Lumen/ft ⁴				
Static White	● W822	2,200 K	140	1.8	240	2.9	390	4.7	24.6 / 7.5	16.4 / 5	16.4 / 5
	● W927	2,700 K	150	1.8	260	2.9	410	4.7	109	115	118
	● W930	3,000 K	160	1.8	260	2.9	420	4.7	95 / 75	95 / 75	95 / 75
	● W935	3,500 K	160	1.8	270	2.9	430	4.7	95 / 100	95 / 100	95 / 100
	● W940	4,000 K	160	1.8	270	2.9	440	4.7	122°F / 50°C	122°F / 50°C	113°F / 45°C
	● W850	5,000 K	190	1.8	340	2.9	550	4.7			
	● W850	5,000 K	190	1.8	340	2.9	550	4.7			

⁴ Lumen values represent bare LED tape. Refer to page 2 to calculate delivered fixture lumens by using the light efficiency percentages.


⁸ The given data are typical values. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

Technical Details


CLEAR	SPREAD	SEMI-OPAL	OPAL	FOCUS	PRIME
96.5% light transmittance	95% light transmittance	85% light transmittance	50% light transmittance	85% light transmittance	85% light transmittance
					
Visible dotting CCT decrease 65 K	Visible dotting CCT decrease 65 K	Slight Visible dotting CCT decrease 130 K	Minimal visible dotting CCT decrease 215 K	Visible dotting CCT decrease 65 K	Minimal visible dotting CCT decrease 130 K
This basic lens protects your tape and maximizes light output.	With its integrated prismatic grooves this lens scatters the light and increases the beam spread to better light nearby objects.	This lens reduces glare and softens light cut-off while maintaining high brightness.	This dense opal lens provides a smooth light effect with greatly reduced LED diode image on the lens surface.	A converging lens that shapes the beam spread for targeted and focused lighting.	This light opal lens reduces glare and softens light cut-off while maintaining the high output levels and greatly diffusing the LED diode image on the surface.

Mounting Dimensions [mm] in

STANDARD LENS

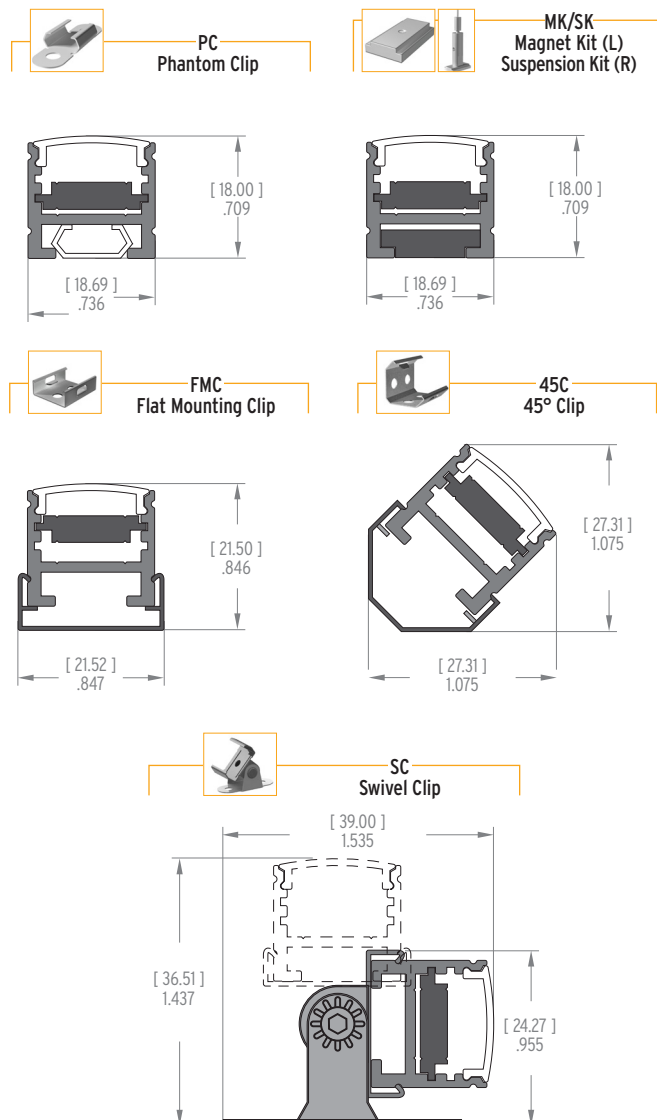

FOCUS LENS

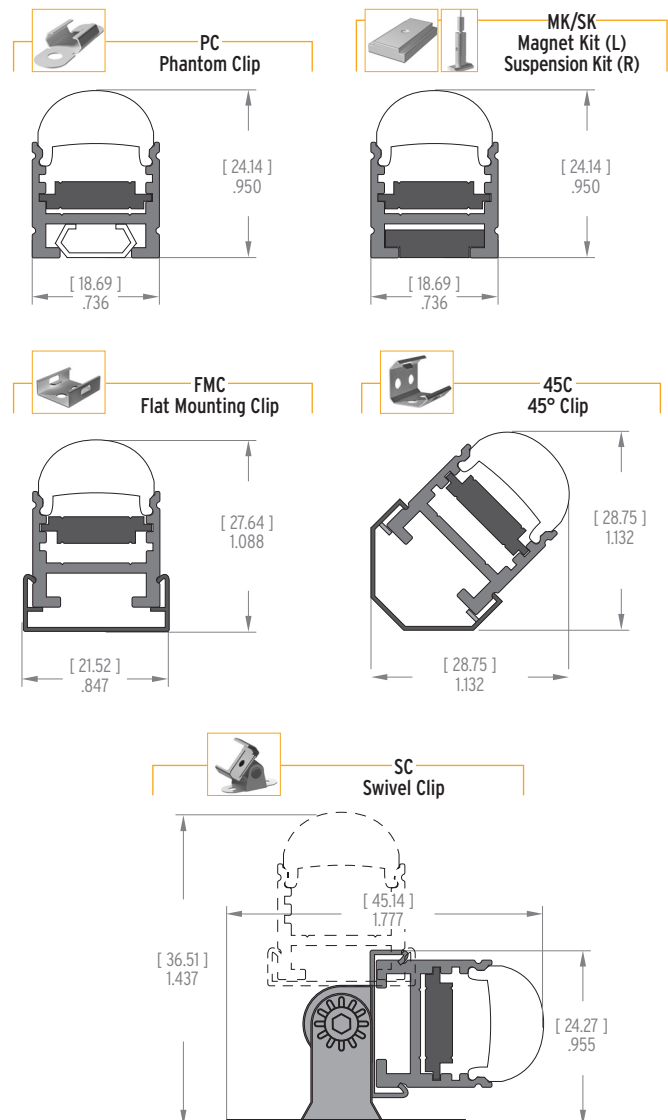

Heatsink insert positions


Distance between LED light source and optic $\left[\begin{matrix} \text{mm} \\ \text{in} \end{matrix} \right]$




Using this accessory may lead to visible dotting.

STANDARD LENS


1. No heatsink



FOCUS LENS




HIGH LENS




STANDARD LENS

2. Heatsink in the lower slot - visible dotting may occur

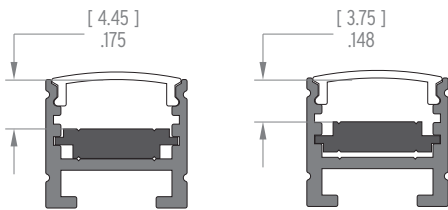


FOCUS LENS

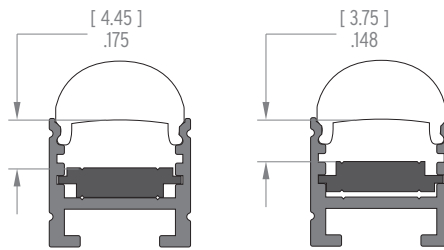


STANDARD LENS

3. Heatsink in the upper slot - visible dotting will occur

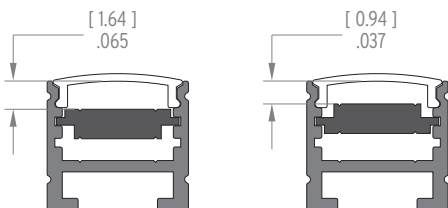

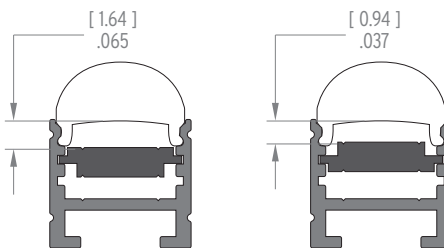

FOCUS LENS



LENGTH CHART

Fixture length		HD6 1.8 Watts/Ft		HD10 2.9 Watts/Ft		HD15 4.7 Watts/Ft	
inches	mm	Watts/fixture	Lumens/fixture @3000K	Watts/fixture	Lumens/fixture @3000K	Watts/fixture	Lumens/fixture @3000K
3.2	83	0.5	42	0.8	68	1.2	108
5.7	145	0.9	74	1.4	119	2.2	190
8.2	208	1.2	105	2.0	170	3.1	272
10.6	270	1.6	137	2.7	221	4.1	354
13.1	333	2.0	169	3.3	273	5.0	436
15.6	395	2.3	201	3.9	324	6.0	518
18.0	458	2.7	233	4.5	375	6.9	600
20.5	520	3.1	264	5.1	426	7.8	682
22.9	583	3.4	296	5.7	478	8.8	764
25.4	645	3.8	328	6.3	529	9.7	846
27.9	708	4.2	360	7.0	580	10.7	928
30.3	770	4.5	391	7.6	631	11.6	1010
32.8	833	4.9	423	8.2	683	12.6	1092
35.2	895	5.3	455	8.8	734	13.5	1174
37.7	958	5.7	487	9.4	785	14.4	1256
40.2	1020	6.0	519	10.0	836	15.4	1338
42.6	1083	6.4	550	10.7	888	16.3	1420
45.1	1145	6.8	582	11.3	939	17.3	1502
47.5	1208	7.1	614	11.9	990	18.2	1584
50.0	1270	7.5	646	12.5	1041	19.2	1666
52.5	1333	7.9	677	13.1	1093	20.1	1748
54.9	1395	8.2	709	13.7	1144	21.0	1830
57.4	1458	8.6	741	14.3	1195	22.0	1912
59.8	1520	9.0	773	15.0	1246	22.9	1994
62.3	1583	9.3	805	15.6	1298	23.9	2076
64.8	1645	9.7	836	16.2	1349	24.8	2158
67.2	1708	10.1	868	16.8	1400	25.8	2240
69.7	1770	10.5	900	17.4	1451	26.7	2322
72.1	1833	10.8	932	18.0	1503	27.6	2404
74.6	1895	11.2	963	18.6	1554	28.6	2486
77.1	1958	11.6	995	19.3	1605	29.5	2568


Connectors

Item	Description	Model	Dimensions	Order Code
	Use to connect the driver to the beginning of the LED tape run or to the next LED tape section. Female mini connector on one side and open end cable on the other side.	Static White	2 x 22 Awg, 6.5 ft	15000147
	Use to extend the distance between connection points. Female mini connector on one side and male mini connector on the other side.	Static White Static White	2 x 22 Awg, 3.2 ft 2 x 22 Awg, 6.5 ft	15000148 15000149

Compatible Drivers

Item	Specifications	Downloads
LED LINEAR™ Non-Dimmable Drivers 	<ul style="list-style-type: none"> • UL 8750 Listed Enclosure - With Built-In Junction Boxes • Universal Input Voltage 120V - 277V • IP65 - For Both Indoor and Outdoor Use • No Minimum Load Requirement • 24V Constant Voltage Output, Class 2 • Available in three wattages 30W, 60W and 96W • Max. Dimensions: 12-1/8" x 2-3/8" x 1-3/8" 	30 W SPEC SHEET 60 W SPEC SHEET 96 W SPEC SHEET INSTALLATION INSTRUCTIONS
LED LINEAR™ 0-10V Dimmable Drivers 	<ul style="list-style-type: none"> • UL 8750 Listed Enclosure - With Built-In Junction Boxes • 0-10V Dimmable - Flicker Free Down to 1% • Universal Input Voltage 120V - 277V • IP65 - For Both Indoor and Outdoor Use • 24V Constant Voltage Output, Class 2, Class P • Available in three wattages 30W, 60W and 96W • Max. Dimensions: 12-1/8" x 2-3/8" x 1-3/8" 	30 W SPEC SHEET 60 W SPEC SHEET 96 W SPEC SHEET INSTALLATION INSTRUCTIONS
LED LINEAR™ ELV/Triac Dimmable Drivers 	<ul style="list-style-type: none"> • UL 8750 Listed Class 2 Enclosure • 24V constant voltage output • Compact size yet high efficiency and performance in dry and damp environments (IP67) • Multiple Inputs: 120V or 277V • Fully dimmable: ELV Dimmers - Reverse or Adaptive Phase Control, Trailing Edge • Available in two wattages 48W and 96W • Multiple Circuits are available up to 4 units (up to 384W) 	48 W SPEC SHEET 96 W SPEC SHEET INSTALLATION INSTRUCTIONS
 PWM Dimmable Drivers 	<ul style="list-style-type: none"> • Universal AC input / Full range (up to 305VAC) • Constant voltage PWM style output • Built-in 3 in 1 dimming function (0-10Vdc or PWM signal or resistance) • Dimming range : 0-100% • Class 2 power unit • Suitable for dry / damp / wet locations • UL Recognized component, 5 years warranty 	40 W SPEC SHEET 60 W SPEC SHEET 90 W SPEC SHEET INSTALLATION INSTRUCTIONS
 Dimmable Drivers 	<ul style="list-style-type: none"> • UL Listed Enclosure • Dimming Range: 100% to 1% and 0.1% (Premiere) • LED lighting turns on to any dimmed level without flashing to full brightness • Operating Voltage: 120V~ to 277V~ at 50/60 Hz • Rated lifetime of 50,000 hours at 40°C (104°F) ambient temperature and maximum loading • For rated warranty, ambient temperature not to exceed 40°C (104°F) • Open-circuit protected output 	HI-LUME SPEC SHEET HI-LUME PREMIERE SPEC SHEET INSTALLATION INSTRUCTIONS
eldoLED DALI/DMX Dimmable Drivers 	<ul style="list-style-type: none"> • Available in linear or rectangular format • 100W, DMX/DALI interface for Static White, Tunable White and RGB/W Applications • 4 control channels • 24V constant voltage, 4 x 24V outputs • Metal or plastic case options 	100 W SPEC SHEET INSTALLATION INSTRUCTIONS

Controllers

Item	Specifications	Downloads
eldoLED Controllers 	180/D DMX Controller for RGB/W and Tunable White Applications	180/D SPEC SHEET
	210/D Dali Controller for Static White Applications	210/D SPEC SHEET
	211/D-LG 0-10V Logarithmic Dimming Controller	211/D-LG SPEC SHEET
	211/D-LN 0-10V Linear Dimming Controller	211/D-LN SPEC SHEET
	212/D DMX Controller for Static White and Static Color Applications	212/D SPEC SHEET
	DimWheel DMX Wall Controller for RGB/W and Tunable White Applications	DIM WHEEL SPEC SHEET

Click for more information

VOLTAGE DROP CALCULATOR

INSTALLATION

LED LINEAR TECHNOLOGY

CANOPY INSTALLATION