




RGBW Wiring Diagram



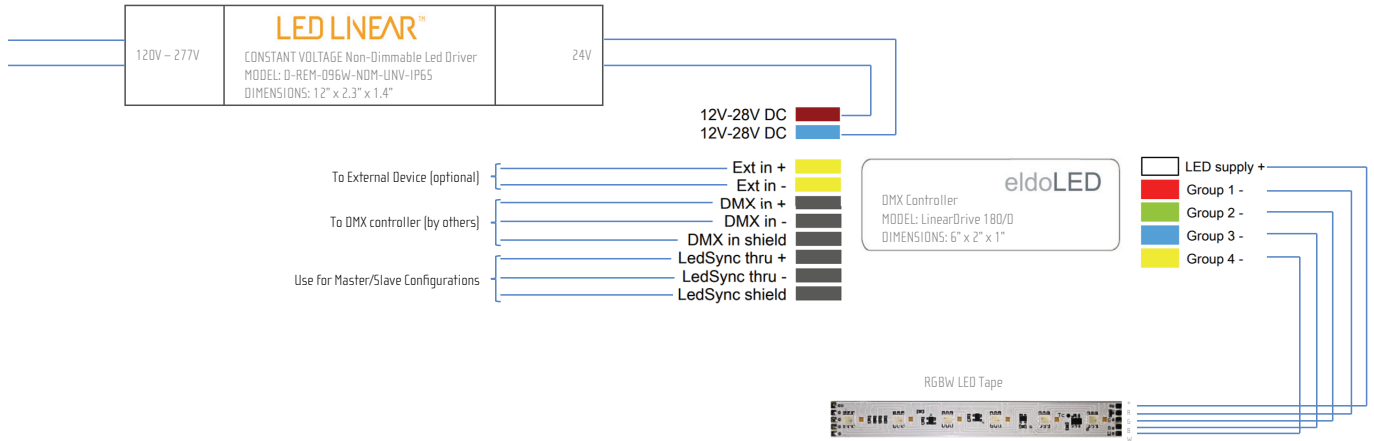

LENGTH CHART

Fixture length		HD20 4.6 Watts/Ft	
inches	mm	Watts/fixture	Lumens/fixture @3000K
4.1	103	2.1	95
7.3	187	3.7	171
10.6	270	5.4	248
13.9	353	7.1	324
17.2	437	8.7	401
20.5	520	10.4	478
23.8	603	12.1	554
27.0	687	13.7	631
30.3	770	15.4	707
33.6	853	17.1	784
36.9	937	18.7	860
40.2	1020	20.4	937
43.4	1103	22.1	1013
46.7	1187	23.7	1090
50.0	1270	25.4	1166
53.3	1353	27.1	1243
56.6	1437	28.7	1319
59.8	1520	30.4	1396
63.1	1603	32.1	1472
66.4	1687	33.7	1549
69.7	1770	35.4	1626
73.0	1853	37.1	1702
76.2	1937	38.7	1779

Compatible Drivers

Item	Specifications	Downloads
<p>LED LINEAR™ Non-Dimmable Drivers</p> 	<ul style="list-style-type: none"> • UL 8750 Listed Enclosure - With Built-In Junction Boxes • Universal Input Voltage 120V - 277V • IP65 - For Both Indoor and Outdoor Use • No Minimum Load Requirement • 24V Constant Voltage Output, Class 2 • Available in three wattages 30W, 60W and 96W • Max. Dimensions: 12-1/8" x 2-3/8" x 1-3/8" 	30 W SPEC SHEET 60 W SPEC SHEET 96 W SPEC SHEET INSTALLATION INSTRUCTIONS
<p>eldoLED DALI/DMX Dimmable Drivers</p> 	<ul style="list-style-type: none"> • Available in linear or rectangular format • 100W, DMX/DALI interface for Static White, Tunable White and RGB/W Applications • 4 control channels • 24V constant voltage, 4 x 24V outputs • Metal or plastic case options 	100 W SPEC SHEET INSTALLATION INSTRUCTIONS

Controllers

Item	Specifications	Downloads
<p>eldoLED Controllers</p>  	<p>180/D DMX Controller for RGB/W and Tunable White Applications</p> <p>DimWheel DMX Wall Controller for RGB/W and Tunable White Applications</p>	180/D SPEC SHEET DIM WHEEL SPEC SHEET

Click for more information

VOLTAGE DROP CALCULATOR

INSTALLATION

LED LINEAR TECHNOLOGY