


Contour 0036 Aluminum Profile

LED LINEAR™

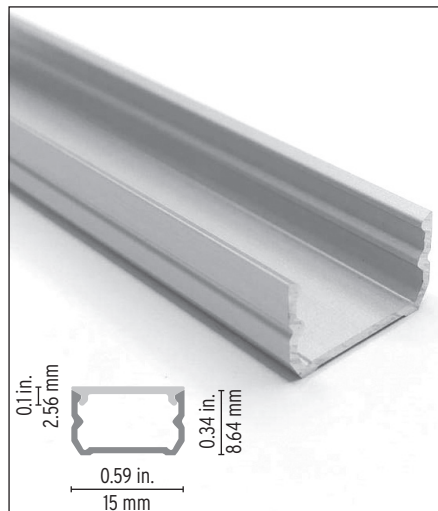

Profile designed to ensure that the LED source is invisible, offering uniform and soft lighting for the eyes. Compact and versatile design.

Features

- Delivered in standard 6.5 ft (2m) length.
- Designed to give a uniform light without hot spots.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories.
- Trimless application for new drywall construction.

Project name

Fixture type

Phase

Specifier


Date



Cable Feed: End (E)
Max 4.7 W/ft

Component Order Code

| Family | Profile | Optic | Endcaps | Mounting |
|---------|-------------|-------------|------------------|----------|
| Contour | 10000537-2m | 12000055-2m | 11000219-RAL9003 | |




Profile, Silver
10000537-2m



Low, Opal
12000055-2m



Low, White Aluminum
(1 piece)
11000219-RAL9003



Trimless Mounting
Profile, PVC
10000580-W-2m

Mounting Dummy, 1m
10000573



Flat Mounting Clip, Metal
13000318




Adhesive Tape, 180 ft.
18200128

Technical Details

LOW OPAL

50% light efficiency




Dot free

5% warmer CCT offset


This lens provides a homogenous line of light.

Mounting Dimensions





Trimless Mounting Profile - PVC

TRIMLESS MOUNTING PROFILE & LOW OPAL

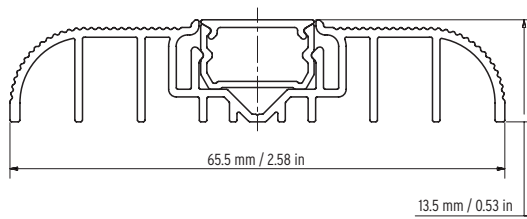


Flat Mounting Clip

FLAT MOUNTING CLIP & LOW OPAL



Endcap

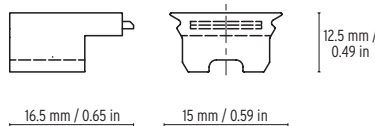

LED FLEX TAPE COMPATIBILITY CHART

✓ Compatible

| LED Tape Family | LED Tape Type | Models ¹ | LED Tape Step Length | Contour 0036 Compatibility |
|------------------------------------|---------------|--|----------------------|----------------------------|
| LUMINARIS | Static White | Luminaris LD05 (1.7W/ft, 152lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris LD10 (2.6W/ft, 311lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris LD15 (4.7W/ft, 463lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris LD22 (6.3W/ft, 659lm/ft) | 2.76"/70mm | |
| | | Luminaris HD05 (1.6W/ft, 201lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris HD10 (2.6W/ft, 320lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris HD15 (4.7W/ft, 552lm/ft) | 2.76"/70mm | ✓ |
| | | Luminaris HD22 (6.3W/ft, 716lm/ft) | 2.76"/70mm | ✓ |
| HYDRA | Static White | Hydra PRO 04 (1.2W/ft, 105lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra PRO 07 (1.9W/ft, 185lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra PRO 13 (3.9W/ft, 430lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra PRO 18 (5.6W/ft, 600lm/ft) | 2.46"/62.5mm | |
| | | Hydra PRO 24 (7.4W/ft, 750lm/ft) | 2.46"/62.5mm | |
| | | Hydra PRO 35 (10.7W/ft, 1100lm/ft) | 2.46"/62.5mm | |
| | | Hydra EXL 04 (1.2W/ft, 135lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra EXL 06 (1.6W/ft, 185lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra EXL 11 (3.2W/ft, 420lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra EXL 15 (4.6W/ft, 600lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra EXL 20 (6.1W/ft, 760lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra EXL 32 (9.7W/ft, 1200lm/ft) | 2.46"/62.5mm | |
| | Tunable White | Hydra Tunable LD25 (7.6W/ft, 503lm/ft) | 4.92"/125mm | |
| | | Hydra Tunable HD12 (3.6W/ft, 213lm/ft) | 2.46"/62.5mm | ✓ |
| | | Hydra Tunable HD24 (7.2W/ft, 472lm/ft) | 2.46"/62.5mm | |
| | RGB | Hydra RGB LD15 (4.6W/ft, 127lm/ft) | 4.92"/125mm | ✓ |
| Hydra RGB HD10 (3.4W/ft, 102lm/ft) | | 2.46"/62.5mm | ✓ | |
| Hydra RGB HD20 (6.7W/ft, 191lm/ft) | | 2.46"/62.5mm | | |
| STATIC COLOR | Static Color | Static Color HD (3.1W/ft, 300lm/ft) | 2.76"/70mm | ✓ |
| RGBW | RGBW | RGBW HD20 (6.1W/ft, 290lm/ft) | 3.27"/83.3mm | ✓ |
| | | RGBW HD40 (12.2W/ft, 490lm/ft) | 3.27"/83.3mm | |

¹ Lumen values reflect measurements of LED tape at 3000K. Tunable White, RGB and Static Color represent the highest possible lumen output.

Click for more information

LED FLEX TAPE

PROFILES & OPTICS

DRIVERS & CONTROLLERS