


Contour 0002 Aluminum Profile

LED LINEAR™

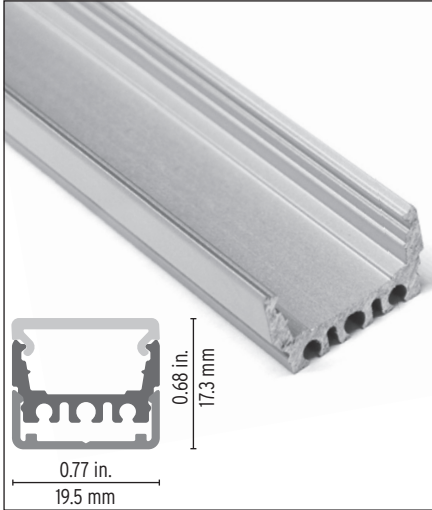

Profile designed to ensure that the LED source is invisible, offering uniform and soft lighting for the eyes. Compact and versatile design.

Features

- Delivered in standard 6.5 ft (2m) length.
- Designed to give a uniform light without hot spots.
- Extra heatsinking to accommodate medium/high power LED tapes.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories.

Project name _____

Fixture type _____ Phase _____


Specifier _____ Date _____




Cable Feed: Side (S), End (E)
Max 7.6 W/ft

Component Order Code

Family	Profile	Optic	Endcaps	Mounting
Contour	10000300			



Profile, Silver
10000300



High
Opal 12000012
Semi-Opal 12000015
Clear 12000018



Round
Opal 12000011
Semi-Opal 12000014
Clear 12000017



Low
Opal 12000013
Semi-Opal 12000016
Clear 12000019



High, Clear Plastic (Set of 2)
11000245



Round, Clear Plastic (Set of 2)
11000249



Low, Clear Plastic (Set of 2)
11000247



Flat Mounting Profile, 6.5ft.
10000039



Flat Mounting Clip, 4in.
10000040

15° Mounting Clip, 4in.
10000040-15d

30° Mounting Clip, 4in.
10000040-30d


45° Mounting Clip, 4in.
10000040-45d



Plastic Mounting Clip
(for vertical mounting)
13000032



Adjustable Mounting Clip
13000082




Wall Mounting Profile 6.5ft.
13000319-2m

Technical Details

HIGH OPAL

55% light efficiency




Dot free

5% warmer CCT offset

This lens provides a homogenous line of light with HD tapes.

LOW OPAL

50% light efficiency




Dot free

5% warmer CCT offset

This lens provides a homogenous line of light with HD tapes.

ROUND OPAL

55% light efficiency




Dot free

5% warmer CCT offset

This lens provides a homogenous line of light with HD tapes.

Clear and Semi-Opal are 95% and 80% efficient respectively. They exhibit visible dotting effect.

Mounting Dimensions




15C/30C/45C
Angled Mounting Clips



FMP/FMC
Flat Mounting
Profile/Clip



PMC
Plastic
Mounting Clip




WMP
Wall Mounting
Profile




Adjustable
Mounting Clip


High

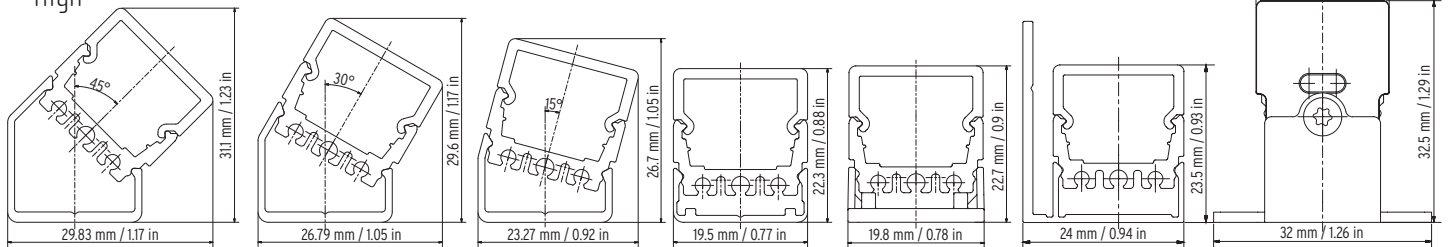

Round

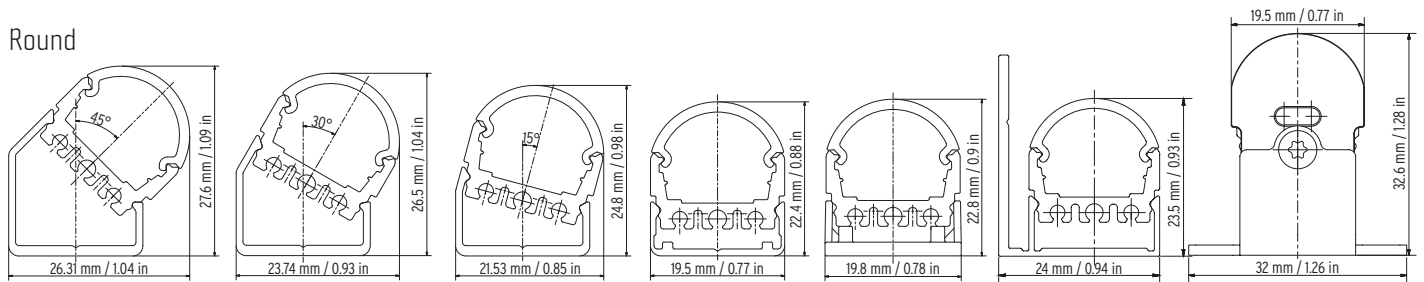

Low

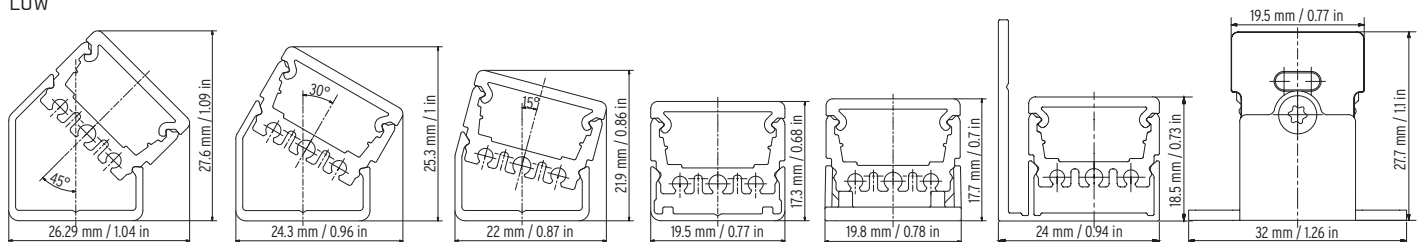

LED FLEX TAPE COMPATIBILITY CHART

✓ Compatible

⊙ Dot free

LED Tape Family	LED Tape Type	Models ¹	LED Tape Step Length	Contour 0002 Compatibility
LUMINARIS	Static White	Luminaris LD05 (1.7W/ft, 152lm/ft)	2.76"/70mm	✓
		Luminaris LD10 (2.6W/ft, 311lm/ft)	2.76"/70mm	✓
		Luminaris LD15 (4.7W/ft, 463lm/ft)	2.76"/70mm	✓
		Luminaris LD22 (6.3W/ft, 659lm/ft)	2.76"/70mm	✓
		Luminaris HD05 (1.6W/ft, 201lm/ft)	2.76"/70mm	⊙
		Luminaris HD10 (2.6W/ft, 320lm/ft)	2.76"/70mm	⊙
		Luminaris HD15 (4.7W/ft, 552lm/ft)	2.76"/70mm	⊙
		Luminaris HD22 (6.3W/ft, 716lm/ft)	2.76"/70mm	⊙
HYDRA	Static White	Hydra PRO 07 (1.9W/ft, 185lm/ft)	2.46"/62.5mm	⊙
		Hydra PRO 13 (3.9W/ft, 430lm/ft)	2.46"/62.5mm	⊙
		Hydra PRO 18 (5.6W/ft, 600lm/ft)	2.46"/62.5mm	⊙
		Hydra PRO 24 (7.4W/ft, 750lm/ft)	2.46"/62.5mm	⊙
		Hydra PRO 35 (10.7W/ft, 1100lm/ft)	2.46"/62.5mm	
	Tunable White	Hydra Tunable LD25 (7.6W/ft, 503lm/ft)	4.92"/125mm	✓
		Hydra Tunable HD12 (3.6W/ft, 213lm/ft)	2.46"/62.5mm	⊙
		Hydra Tunable HD24 (7.2W/ft, 472lm/ft)	2.46"/62.5mm	⊙
	RGB	Hydra RGB LD15 (4.6W/ft, 127lm/ft)	4.92"/125mm	✓
		Hydra RGB HD10 (3.4W/ft, 102lm/ft)	2.46"/62.5mm	⊙
Hydra RGB HD20 (6.7W/ft, 191lm/ft)		2.46"/62.5mm	⊙	
STATIC COLOR	Static Color	Static Color HD (3.1W/ft, 300lm/ft)	2.76"/70mm	⊙

1) Lumen values reflect measurements of LED tape at 3000K. Tunable White, RGB and Static Color represent the highest possible lumen output.

Click for more information

LED FLEX TAPE

PROFILES & OPTICS

DRIVERS & CONTROLLERS