
## Contour 1512 Aluminum Profile





Contour 1512 has been designed for recessed applications with small spaces. With its height of 0.52" (13.4 mm) it fits perfect into dry construction. It has an opal cover and a diffused light output surface. The channels and optics are field cuttable and provide heat sink for LED tapes up to 7.4 W/ft. White or black finish.


#### **Features**

- Delivered in standard 6.5 ft (2 m) lengths.
- Extra heatsinking to accommodate medium power LED tapes.
- Its use increases the lifetime of your LED strip.
- · Compatible with recessed installation accessories.

Project name	
Fixture type	Phase
Specifier	Date

Cable Feed: End (E) Max 7.4 W/ft


## Component Order Code

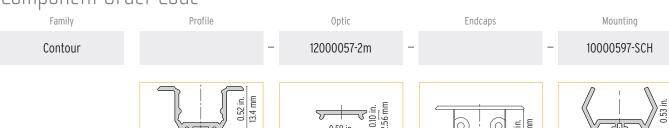

15.4 mm White 10000535-RAL9003-2m Black 10000535-SCH-2m

0.60 in.





Mounting Spring 10000597-SCH

0.88 in.

22 4 mm

### Technical Details


#### LOW OPAL

effect.

# 50% light efficiency

#### Visible Dotting 5% warmer CCT offset This lens exhibits visible dotting

## Mounting Dimensions



# Contour 1512 Aluminum Profile



LED FLEX TAPE COMPATIBILITY CHART		✓ Compatible	<b>⊘</b> Dot free	
LED Tape Family	LED Tape Type	Models <sup>1</sup>	LED Tape Step Length	Contour 1512 <sup>2</sup> Compatibility
LUMINARIS	Static White	Luminaris LD05 (1.7 W/ft, 1521m/ft)	2.76"/70mm	<b>✓</b>
		Luminaris LD10 (2.6 W/ft, 311 lm/ft)	2.76"/70mm	<b>✓</b>
		Luminaris LD15 (4.7 W/ft, 463 lm/ft)	2.76"/70mm	<b>✓</b>
		Luminaris LD22 (6.3W/ft, 659Im/ft)	2.76"/70mm	<b>✓</b>
		Luminaris HD05 (1.6W/ft, 2011m/ft)	2.76"/70mm	<b>✓</b>
		Luminaris HD10 (2.6W/ft, 320Im/ft)	2.76"/70mm	<b>✓</b>
		Luminaris HD15 (4.7 W/ft, 5521m/ft)	2.76"/70mm	~
		Luminaris HD22 (6.3W/ft, 716Im/ft)	2.76"/70mm	<b>✓</b>
HYDRA Tunable White	Static White	Hydra PRO 07 (1.9W/ft, 1851m/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra PRO 13 (3.9W/ft, 430Im/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra PRO 18 (5.6W/ft, 6001m/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra PRO 24 (7.4W/ft, 750Im/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra PRO 35 (10.7 W/ft, 1100 lm/ft)	2.46"/62.5mm	
	Tunable White	Hydra Tunable LD25 (7.6W/ft, 503lm/ft)	4.92"/125mm	<b>✓</b>
		Hydra Tunable HD12 (3.6W/ft, 213Im/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra Tunable HD24 (7.2W/ft, 472Im/ft)	2.46"/62.5mm	<b>✓</b>
	RGB	Hydra RGB LD15 (4.6 W/ft, 127 lm/ft)	4.92"/125mm	<b>✓</b>
		Hydra RGB HD10 (3.4W/ft, 102Im/ft)	2.46"/62.5mm	<b>✓</b>
		Hydra RGB HD20 (6.7 W/ft, 1911m/ft)	2.46"/62.5mm	<b>✓</b>
STATIC COLOR	Static Color	Static Color HD (3.1W/ft, 3001m/ft)	2.76"/70mm	<b>✓</b>

<sup>1)</sup> Lumen values reflect measurements of LED tape at 3000K. Tunable White, RGB and Static Color represent the highest possible lumen output.

Click for more information

LED FLEX TAPE PROFILES & OPTICS DRIVERS & CONTROLLERS

LED Linear™ USA, Inc. | Edition: 03/08/2022 2 (2)

<sup>2)</sup> These profiles will be dot-free when ordered as Assembled Solutions.