


Contour 2200 Aluminum Profile

LED LINEAR™

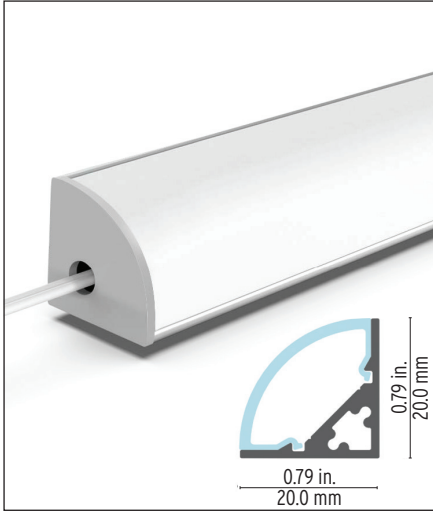

Offering lighting without hot spots at a 45-degree angle from a corner, the 2200 excels at maximizing appeal of the products in displays, while maintaining a minimalist style. Black or Silver finish.

Features

- Delivered in standard 6.5 ft (2m) length.
- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light with an opal square optic.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Only available in North America.

Project name	
Fixture type	Phase
Specifier	Date



Linear weight:
0.12 lbs/ft (without optic)

Cable Feed: End (E)
Max 4.7 W/ft


Component Order Code

Family	Profile	Optic	Endcaps	Mounting
Contour	2200			
	 Round, Semi-Opal 2234			
	 Round, Prime Opal 2035			

Technical Details

ROUND SEMI-OPAL

85% light efficiency




Slight visible dotting
CCT decrease 130 K

This lens reduces glare and softens light cut-off while maintaining high brightness.

PRIME OPAL


72% light efficiency



Dot free
CCT decrease 215 K

This light opal lens reduces glare and softens light cut-off while maintaining the high output levels and greatly diffusing the LED diode image on the surface.

Mounting Dimensions [mm]

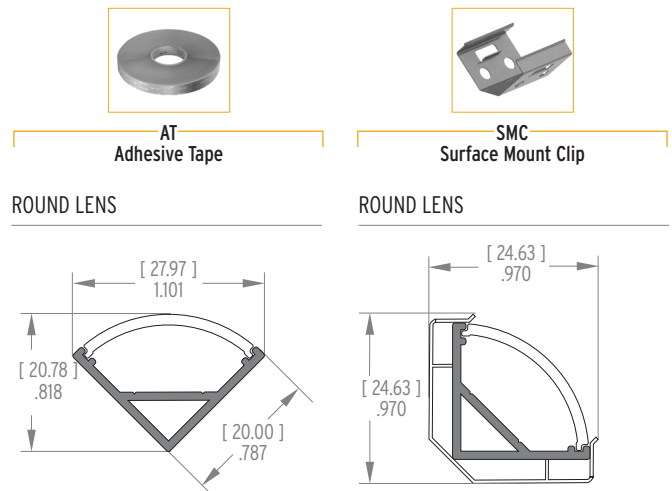

LED FLEX TAPE COMPATIBILITY CHART

✓ Compatible

LED Tape Family	LED Tape Type	Models ¹	LED Tape Step Length	Contour 2200 Compatibility
LUMINARIS	Static White	Luminaris LD05 (1.7W/ft, 152lm/ft)	2.76"/70mm	✓
		Luminaris LD10 (2.6W/ft, 311lm/ft)	2.76"/70mm	✓
		Luminaris LD15 (4.7W/ft, 463lm/ft)	2.76"/70mm	✓
		Luminaris LD22 (6.3W/ft, 659lm/ft)	2.76"/70mm	
		Luminaris HD05 (1.6W/ft, 201lm/ft)	2.76"/70mm	✓
		Luminaris HD10 (2.6W/ft, 320lm/ft)	2.76"/70mm	✓
		Luminaris HD15 (4.7W/ft, 552lm/ft)	2.76"/70mm	✓
		Luminaris HD22 (6.3W/ft, 716lm/ft)	2.76"/70mm	✓
HYDRA	Static White	Hydra PRO 07 (1.9W/ft, 185lm/ft)	2.46"/62.5mm	✓
		Hydra PRO 13 (3.9W/ft, 430lm/ft)	2.46"/62.5mm	✓
		Hydra PRO 18 (5.6W/ft, 600lm/ft)	2.46"/62.5mm	
		Hydra PRO 24 (7.4W/ft, 750lm/ft)	2.46"/62.5mm	
		Hydra PRO 35 (10.7W/ft, 1100lm/ft)	2.46"/62.5mm	
	Tunable White	Hydra Tunable LD25 (7.6W/ft, 503lm/ft)	4.92"/125mm	
		Hydra Tunable HD12 (3.6W/ft, 213lm/ft)	2.46"/62.5mm	✓
		Hydra Tunable HD24 (7.2W/ft, 472lm/ft)	2.46"/62.5mm	
	RGB	Hydra RGB LD15 (4.6W/ft, 127lm/ft)	4.92"/125mm	✓
		Hydra RGB HD10 (3.4W/ft, 102lm/ft)	2.46"/62.5mm	✓
Hydra RGB HD20 (6.7W/ft, 191lm/ft)		2.46"/62.5mm		
STATIC COLOR	Static Color	Static Color HD (3.1W/ft, 300lm/ft)	2.76"/70mm	✓

¹) Lumen values reflect measurements of LED tape at 3000K. Tunable White, RGB and Static Color represent the highest possible lumen output.

Click for more information

LED FLEX TAPE

PROFILES & OPTICS

DRIVERS & CONTROLLERS