


Contour 2200 Aluminum Profile

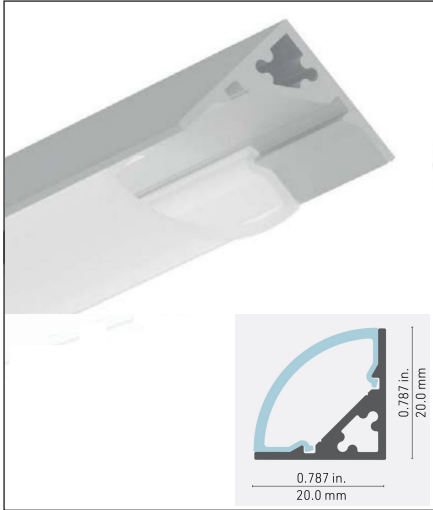

Offering lighting without hot spots at a 45-degree angle from a corner, the 2200 excels at maximizing appeal of the products in displays, while maintaining a minimalist style.

Features

- Delivered in standard 6.5 ft (2m) length.
- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light with an opal square optic.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED strip.
- Only available in North America.

Project name _____

Fixture type _____ Phase _____








Specifier _____ Date _____



Linear weight:
0.12 lbs/ft (without optic)

Cable Feed: End (E)
Max 4.7 W/ft


Component Order Code

Family	Profile	Optic	Endcaps	Mounting
Contour	2200			
				
Profile, Silver 2200	Profile, Black 2201	Round, Semi-Opal 2234	Round Endcap 2171 RIGHT, NO HOLE 2170 RIGHT, HOLE 2173 LEFT, NO HOLE 2172 LEFT, HOLE	Surface Mount Clip, 2000 Series 2060
				
		Round, Prime 2235		Adhesive Tape, 8mm (33m roll) 1033

Technical Details

ROUND SEMI-OPAL

85% light efficiency




Slight visible dotting
CCT decrease 130 K

This lens reduces glare and softens light cut-off while maintaining high brightness.

ROUND PRIME

50% light efficiency



Minimal visible dotting
CCT decrease 215 K


This lens allows for continuous illumination and a homogenous line of light.

Mounting Dimensions [mm] in




Adhesive Tape

ROUND LENS



Surface Mount Clip

ROUND LENS



LED FLEX TAPE COMPATIBILITY CHART

✓ Compatible

☑ Dot free with Opal/Prime Lenses

LED Tape Family	LED Tape Type	Models ¹	LED Tape Step Length	Contour 2000 Compatibility
LUMINARIS	Static White	Luminaris LD05 (1.7w/ft, 152lm/ft)	2.76"/70mm	✓
		Luminaris LD10 (2.6w/ft, 311lm/ft)	2.76"/70mm	✓
		Luminaris LD15 (4.7w/ft, 463lm/ft)	2.76"/70mm	✓
		Luminaris LD22 (6.3w/ft, 659lm/ft)	2.76"/70mm	
		Luminaris HD05 (1.6w/ft, 201lm/ft)	2.76"/70mm	☑
		Luminaris HD10 (2.6w/ft, 320lm/ft)	2.76"/70mm	☑
		Luminaris HD15 (4.7w/ft, 552lm/ft)	2.76"/70mm	☑
HYDRA	Static White	Hydra LD05 (1.5w/ft, 145lm/ft)	4.92"/125mm	✓
		Hydra LD10 (3.1w/ft, 359lm/ft)	4.92"/125mm	✓
		Hydra LD15 (4.6w/ft, 575lm/ft)	4.92"/125mm	✓
		Hydra LD25 (7.6w/ft, 935lm/ft)	4.92"/125mm	
		Hydra LD40 (12w/ft, 1212lm/ft)	4.92"/125mm	
		Hydra HD06 (1.8w/ft, 173lm/ft)	2.46"/62.5mm	☑
		Hydra HD10 (3.1w/ft, 289lm/ft)	2.46"/62.5mm	☑
		Hydra HD15 (4.6w/ft, 575lm/ft)	2.46"/62.5mm	☑
		Hydra HD25 (7.6w/ft, 935lm/ft)	2.46"/62.5mm	
		Hydra HD36 (11w/ft, 1365lm/ft)	2.46"/62.5mm	
	Tunable White	Hydra Tunable LD25 (7.6w/ft, 503lm/ft)	4.92"/125mm	
	RGB	Hydra RGB LD15 (4.6w/ft, 127lm/ft)	4.92"/125mm	✓
		Hydra RGB HD10 (3.4w/ft, 102lm/ft)	2.46"/62.5mm	☑
Hydra RGB HD20 (6.7w/ft, 191lm/ft)		2.46"/62.5mm		
NEXUS	Static White	Nexus HD06 (1.8w/ft, 160lm/ft)	2.46"/62.5mm	☑
		Nexus HD10 (2.9w/ft, 260lm/ft)	2.46"/62.5mm	☑
		Nexus HD15 (4.7w/ft, 420lm/ft)	2.46"/62.5mm	☑
		Nexus HD25 (7.6w/ft, 690lm/ft)	2.46"/62.5mm	
		Nexus HD40 (12.2w/ft, 1120lm/ft)	2.46"/62.5mm	
		Nexus UHD15 (4.6w/ft, 410lm/ft)	1.64"/41.7mm	☑
	Tunable White	Nexus UHD25 (7.6w/ft, 680lm/ft)	1.64"/41.7mm	
		Nexus Tunable HD12 (3.9w/ft, 190lm/ft)	2.46"/62.5mm	☑
		Nexus Tunable HD24 (7.3w/ft, 410lm/ft)	2.46"/62.5mm	
		Nexus Tunable HD42 (12.8w/ft, 770lm/ft)	2.46"/62.5mm	
SOL	Static White	Sol LD15 (4.7w/ft, 480lm/ft)	4.92"/125mm	✓
		Sol LD25 (7.6w/ft, 780lm/ft)	4.92"/125mm	
		Sol HD15 (4.7w/ft, 480lm/ft)	2.46"/62.5mm	☑
		Sol HD25 (7.6w/ft, 780lm/ft)	2.46"/62.5mm	
	Sol HD36 (11w/ft, 1160lm/ft)	2.46"/62.5mm		
Tunable White	Sol Tunable LD20 (6w/ft, 410lm/ft)	9.84"/250mm		
STATIC COLOR	Static Color	Static Color HD (3.1w/ft, 300lm/ft)	2.76"/70mm	☑

1) Lumen values reflect measurements of LED tape at 3000K. Tunable White, RGB and Static Color represent the highest possible lumen output.

Click for more information

LED FLEX TAPE

PROFILES & OPTICS

DRIVERS & CONTROLLERS