


VarioContour 0002 Aluminum Profile

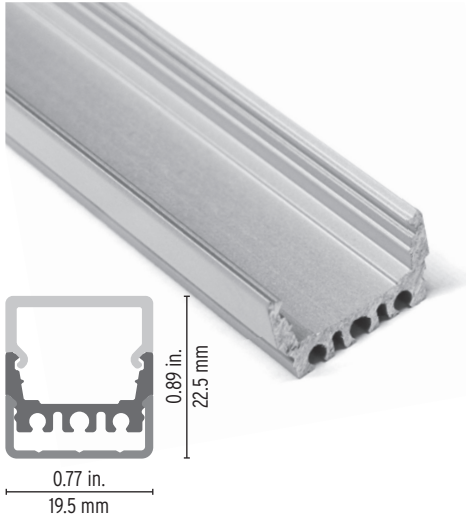

Profile designed to ensure that the LED source is invisible, offering uniform and soft lighting for the eyes. Compact and versatile design.

Features

- Delivered in standard 6.5 ft (2m) length.
- Available as factory assembled complete fixture. See page 3 for details.
- Designed to give a uniform light without hot spots.
- Extra heatsinking to accommodate medium power LED tapes.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories.

Project name	
Fixture type	Phase
Specifier	Date



Cable Feed: Side (S)
Max 7.6 W/ft

Order Code - Component

Family	Profile	Optic	Endcaps	Mounting
VarioContour	10000300		11000012	

Technical Details



Optic

HIGH SQUARE, OPAL

ROUND, OPAL

60% efficiency

60% efficiency




Diffusion 100%
CCT offset -215 Kelvin


Diffusion 100%
CCT offset -215 Kelvin

Assembly Dimensions mm / in

High Square Opal Optic

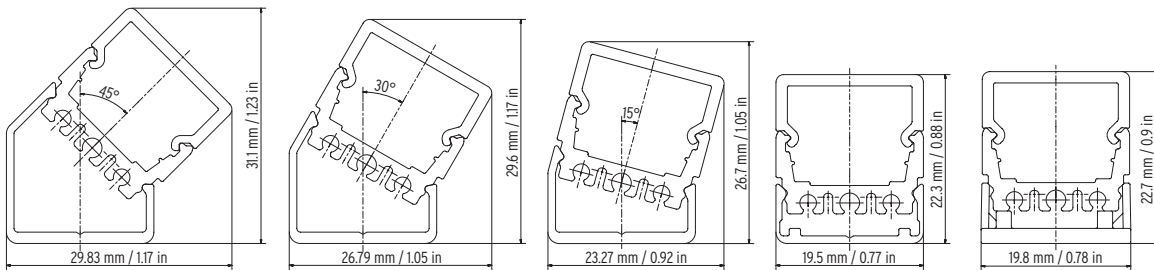

Round Opal Optic

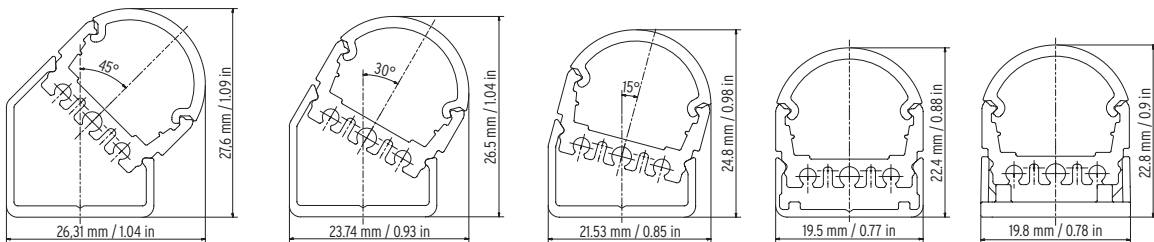


Order Code - Factory Assembled Fixture

Family	LED Tape Order Code	Profile Component Order Code ^A	Cable/Connector	Cable Position ^B	Custom Length (mm)	Ingress
VarioLED	Refer to LED Tape Spec Sheet	Refer to Profile Spec Sheet (Page 1)	A - Female and Male IP20 Connector (4 in) B - Male IP20 Connector on one side (4 in) C - Open end cable lead on both sides (2 ft) D - Open end lead on one side (2 ft)	S - Cables from side of fixture	Refer to Custom Tape Length Chart Below (insert L)	IP20


Example

VarioLED	Hydra HD15 W830	1200 1269 1280	A	B	1969	IP20
----------	-----------------	----------------	---	---	------	------

Custom Length (L)



Cable Position

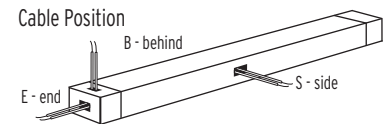

Tape Length (x) Chart ^{C,D}	Min. Tape Length	Max. Tape Length	Tape Increment
Luminaris LD	70 mm / 2.76"	1970 mm / 77.56"	70 mm / 2.76"
Luminaris HD	70 mm / 2.76"	1970 mm / 77.56"	70 mm / 2.76"
Hydra LD	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra HD	62.5 mm / 2.46"	1947 mm / 76.67"	62.5 mm / 2.46"
Hydra LD Tunable White	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra LD RGB	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra HD RGB	62.5 mm / 2.46"	1947 mm / 76.67"	62.5 mm / 2.46"

^A Do not need to specify endcaps. Factory assembled fixtures come with endcaps to match the selected optic, cable and connector configurations.

^B Some cable positions may not be available for certain models. See profile spec sheets for details.

^C Maximum fixture length is 6.5 ft (2m) for all models.

^D For custom fixture length, add 5 mm / 0.2" for each endcap thickness and 6 mm / 0.25" for soldering space.