


VarioContour 0024 Aluminum Profile

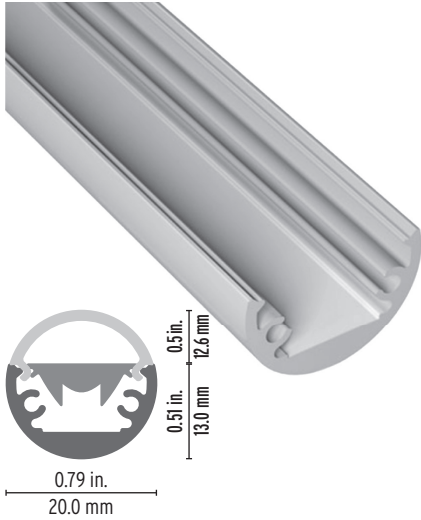

Round Profile designed for a variety of linear LED lighting needs. Different mounting options offer great flexibility for your linear application. The channel provide heat sink for low and medium power LED tapes where smaller installation heights are required. High light extraction efficacy and superior light quality.

Features

- Delivered in standard 6.5 ft (2m) length.
- Available as factory assembled complete fixture. See page 3 for details.
- Designed to give a uniform light without hot spots.
- Its use increases the lifetime of your LED strip.
- Compatible with multiple installation accessories including pendant and surface mounting brackets.
- Various linear lens options for different lighting requirements.

Project name	
Fixture type	Phase
Specifier	Date



Cable Feed: Behind (B)
Max 7.6 W/ft

Order Code - Component


Family	Profile	Optic	Endcaps	Mounting
VarioContour	10000511			
				6.5 ft cable length, recommended spacing is 3.25 ft

Technical Details

Optic

ROUND, OPAL


60% efficiency



Diffusion 100%
CCT offset -215 Kelvin

LINEAR FLAT LENS,
DIFFUSE


88% efficiency




Diffusion 100%
CCT offset -50 Kelvin

Assembly Dimensions mm / in

VarioContour 0024 with 2 piece Surface Mounting Bracket

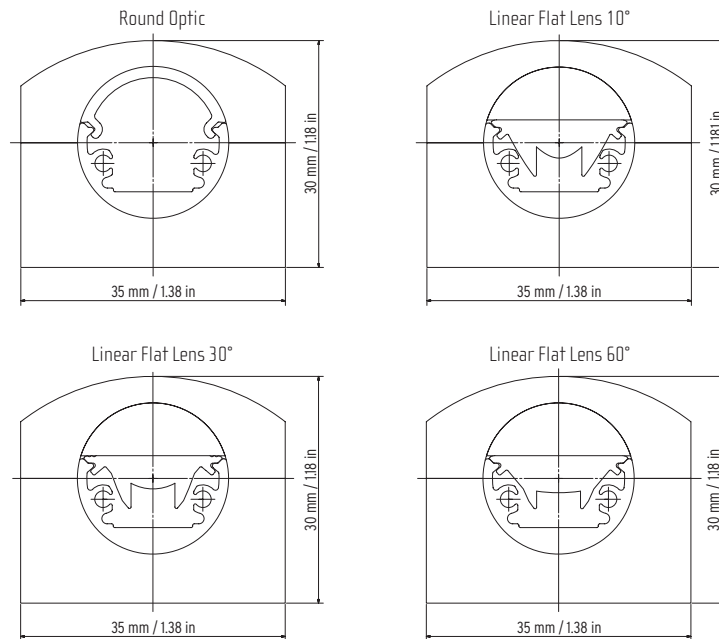

VarioContour 0024 with Surface Mounting Bracket

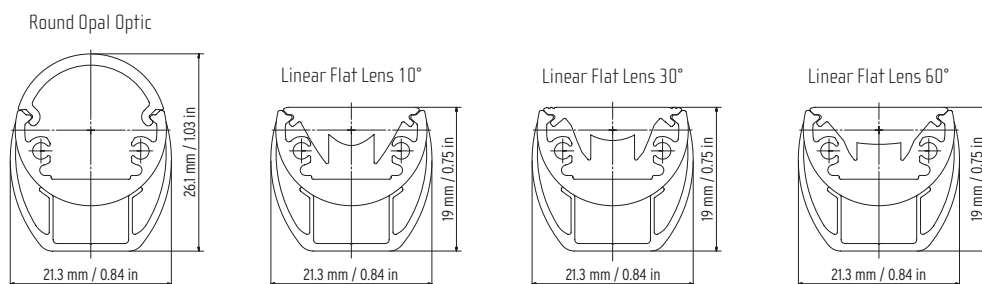


Order Code - Factory Assembled Fixture

Family	LED Tape Order Code	Profile Component Order Code ^A	Cable/Connector	Cable Position ^B	Custom Length (mm)	Ingress
VarioLED						IP20
	Refer to LED Tape Spec Sheet	Refer to Profile Spec Sheet (Page 1)	A - Female and Male IP20 Connector (4 in) B - Male IP20 Connector on one side (4 in) C - Open end cable lead on both sides (2 ft) D - Open end lead on one side (2 ft)	B - Cables from behind fixture	Refer to Custom Tape Length Chart Below (insert L)	


Example

VarioLED	Hydra HD15 W830	1200 1269 1280	A	B	1969	IP20
----------	-----------------	----------------	---	---	------	------

Custom Length (L)



Cable Position



Tape Length (x) Chart ^{C,D}	Min. Tape Length	Max. Tape Length	Tape Increment
Luminaris LD	70 mm / 2.76"	1970 mm / 77.56"	70 mm / 2.76"
Luminaris HD	70 mm / 2.76"	1970 mm / 77.56"	70 mm / 2.76"
Hydra LD	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra HD	62.5 mm / 2.46"	1947 mm / 76.67"	62.5 mm / 2.46"
Hydra LD Tunable White	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra LD RGB	125 mm / 4.92"	1885 mm / 74.21"	125 mm / 4.92"
Hydra HD RGB	62.5 mm / 2.46"	1947 mm / 76.67"	62.5 mm / 2.46"

^A Do not need to specify endcaps. Factory assembled fixtures come with endcaps to match the selected optic, cable and connector configurations.

^B Some cable positions may not be available for certain models. See profile spec sheets for details.

^C Maximum fixture length is 6.5 ft (2m) for all models.

^D For custom fixture length, add 5 mm / 0.2" for each endcap thickness and 6 mm / 0.25" for soldering space.